


LADY PACK®




...LADY PACK®

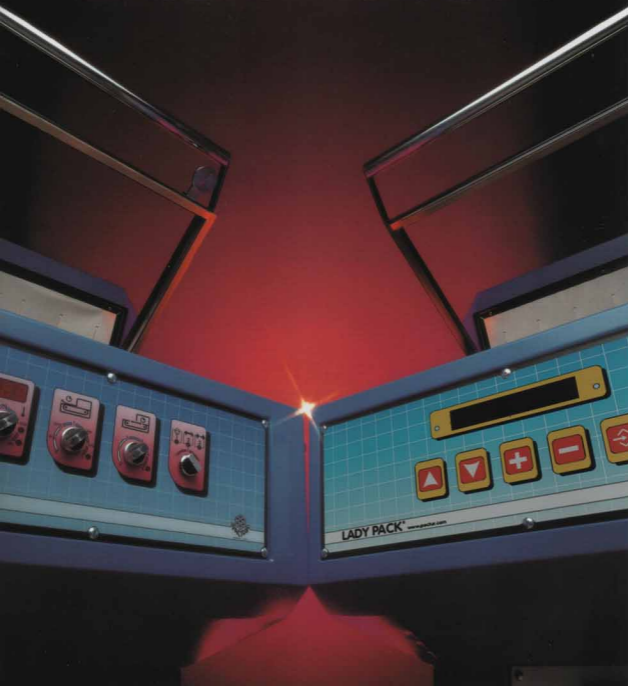

The 35/N, 45/N and 65/N, with or without legs, are the economical solutions to your packaging problems. Compact, solid and with an industrial tunnel to assure high performance with all shrink films. Automatic takeaway, unique reversible conveyor... in short, LADY PACK quality at a reasonable price.

Versatility with Value

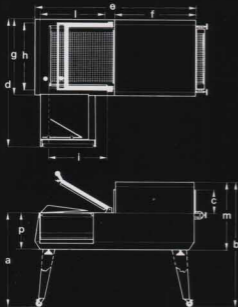

LADY PACK

35N

45N

65N

Sealing Dim. (in.)	350 x 270	450 x 340	650 x 450	
Max. Prod. Ht.	120	170	200	
Voltage/phase	220 single	220 single	380	
Power	4200 W	4200 W	6300 W	
Consumption	1400 W/h	1400 W/h	2800 W/h	
Dimensions (mm):				
(with legs)	a	880	880	935
(with legs)	b	1080	1120	1220
Tunnel Height	c	150	210	240
Total Width	d	1050	1080	1550
Total Length	e	1000	1150	1670
Tunnel Length	f	450	510	730
Body Width	g	550	600	800
Sealing Bar Width	h	385	450	630
Sealing Bar Length	i	265	340	430
Film Holder Dept	l	390	510	710
Rear Body Height	m	570	590	660
Front Body Height	p	355	345	380

Shrink wrap machines for pack

LADYPACK 45L



Based upon the 45, with a higher capacity tunnel.
 45/SL1 – Manual sealing arm, single conveyor.
 45/SL2 – Manual sealing arm, twin conveyors.
 45/AL1 – Automatic sealing arm, single conveyor.
 45/AL2 – Automatic sealing arm, twin conveyors.
 All models – automatic takeaway after sealing.

LADYPACK 65



Mid-size machine for packing medium to large items.
 65/S1 – Manual sealing arm, single conveyor.
 65/S2 – Manual sealing arm, twin conveyor.
 65/A1 – Automatic sealing arm, single conveyor.
 65/A2 – Automatic sealing arm, twin conveyors.
 All models – automatic takeaway after sealing.

Advanced co Lady pack machines g

SINGLE OPERATOR CAPABILITY

Unique reversible conveyor lets you control where product goes either traditionally through tunnel and out; or into tunnel, shrink, and back to operator.

TAKES UP LESS FLOOR SPACE

Mobile and compact, LADY PACK fits into spaces other machines cannot.

ALL TYPES OF SHRINKFILMS

Thanks to its highly efficient tunnel design, LADY PACK works easily with PVC, polyethylene, polypropylene and polyolefin films.

Models	Seal Dimension (in)	Max. product ht.	Power	Effective consumption (Wh)	Voltage phase	Wt. Kg
45	450x140	170	4200	1500	220	125
45L	450x140	170	6300	2100	380	140
65	650x150	200	8400	2800	380	150
80	785x150	240	8400	2800	380	190
110	1150x800	200	14.700	6300	380	280

* Production rates are dependent on pack size and operator.

** All technical data subject to change at manufacturer's discretion.

Sealing in PVC, Polypropylene, Po

LADYPACK 80




Full-sized machine suitable for larger items.
80/S1 - Manual sealing arm, single conveyor.
80/S2 - Manual sealing arm, twin conveyors.
80/A1 - Automatic sealing arm, single conveyor.
80/A2 - Automatic sealing arm, twin conveyors.
All models - automatic takeaway after sealing.

Cost-saving features... world proven reliability and performance
give you more ways to put them to work, more ways

EXCLUSIVE AUTOMATIC SEALING CONTROL - Sealing time is automatically controlled and corrected relative to need.

Results are more consistent seals, reduced fuming and burning.

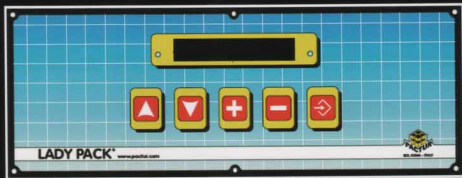

MICROPROCESSOR CONTROLS THAT ARE TRULY "USER-FRIENDLY"


Polyethylene and Polyolefin films

LADYPACK 110



Giant-sized machine for packing oversize items such as framed pictures and posters.
 110/A1 – Automatic sealing arm, single conveyor.
 110/A2 – Automatic sealing arm, twin conveyors.
 All models – automatic takeaway after sealing.

performance
 s to save you money

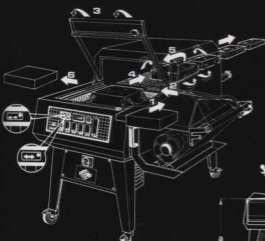

DIM	MODELS			
	45/L	65	90	110/A
a	880	935	930	940
b	1120	1220	1220	1228
c	210	240	240	240
d	1080	1550	1800	2640
e	1350	1670	2000	2850
f	690	730	930	1130
g	600	800	950	1140
h	450	650	800	1150
i	340	450	560	800
j	510	710	800	1100

